

■ SURFACE MOUNTING JUNCTION BOXES IN DIE-CAST ALUMINIUM



■ REFERENCE STANDARDS


EN 60670-1

EN 60670-22

■ MARKINGS AND DIRECTIVES



■ VERSIONS

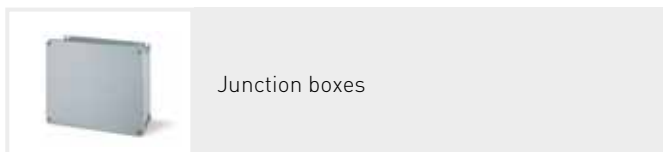

■ TECHNICAL CHARACTERISTICS

Protection degree:	IP66/67/69 IP66 (size 7)
Installation temperature:	-40°C +90°C
Material:	Aluminium alloy
Impact resistance (IK degree):	IK08
Cable entries:	Blank side
DIN rail fixing:	Yes
Colour:	Grey RAL 7040 with metallic pigments

Heavy duty appliance for internal industrial applications.

■ BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Limited resistance	Resistant	Limited resistance	Limited resistance	Limited resistance	Resistant	Resistant	Resistant

Resistance values to chemical agents have to be considered indicative. For further information and specific substances, contact the technical service.

