

■ CABLE GLANDS AND ACCESSORIES FOR CABLING (HEAVY DUTY)

■ REFERENCE STANDARDS


EN 62444



■ MARKINGS AND DIRECTIVES



■ VERSIONS

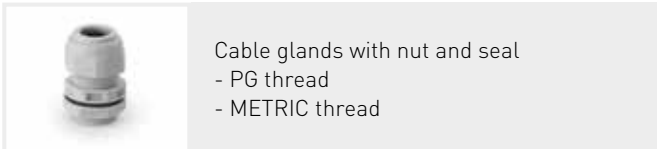

■ TECHNICAL CHARACTERISTICS

Protection degree:	IP68/IP69
Installation temperature:	-20°C +60°C
Self extinguishing degree [GWT]:	750°C
Material:	Thermoplastic (Halogen Free)
Impact resistance (IK degree):	IK06
Colour:	Grey RAL 7035

■ CABLE GLAND SELECTION TABLE: METRIC/PG

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46														

■ BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Not resistant	Not resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

Resistance values to chemical agents have to be considered indicative. For further information and specific substances, contact the technical service.

