






DIMENSIONS

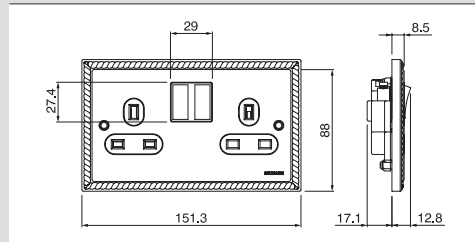



CLASSICA LINE

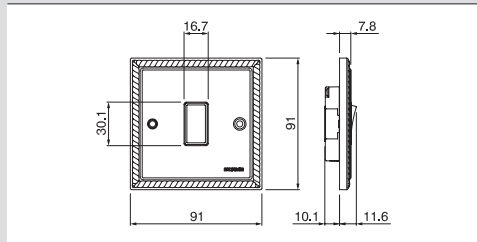



PIANA LINE

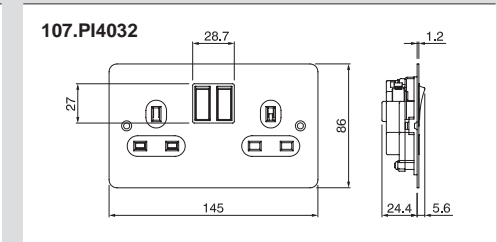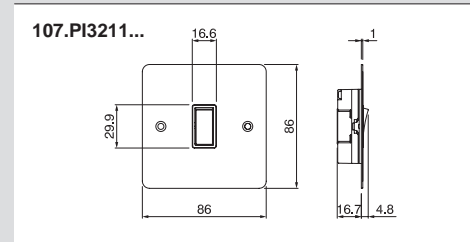



MODERNA LINE

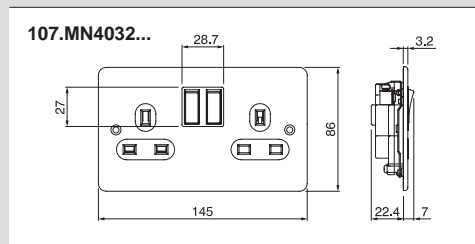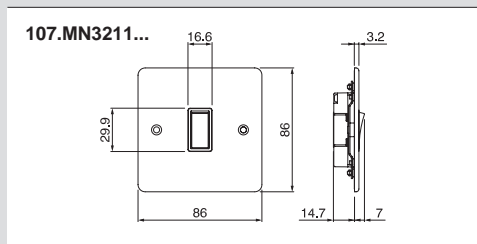



FUTURA LINE

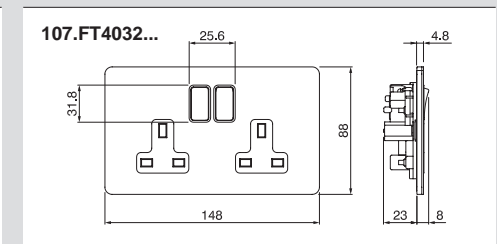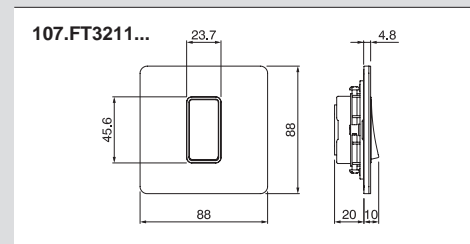

MODERNA SCREWLESS LINE

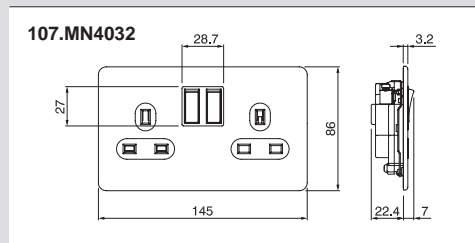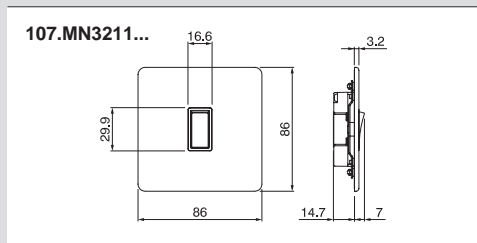

DISTANCE BETWEEN FIXING CENTERS

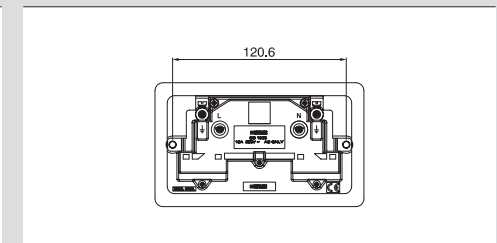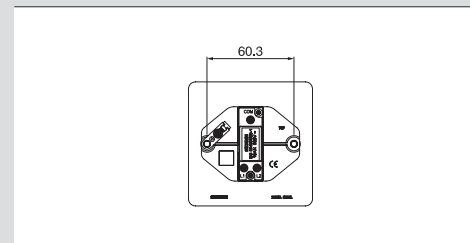

(Dimensions in mm)

(Dimensions in mm)


CONTROL DEVICES - SINGLE POLE SWITCHES

REFERENCES STANDARDS



BS EN 60669-1 (2000)
Switches for household and similar fixed-electrical installation.
Part 1: General requirements.

LINE



VERSIONS

	Switches - 1 gang - 10AX, 2 way, SP - 20AX, 2 way, SP - 10AX, Intermediate switch - 20AX, Intermediate switch - 10A, Bell push switch - 10A, Bell push, "Press", with neon
	Switches - 2 gang - 10AX, 2 way, SP - 20AX, 2 way, SP
	Switches - 3 gang - 10AX, 2 way, SP, single plate
	Switches - 3 gang - 20AX, 2 way, SP, double plate

	Switches - 4 gang - 10AX, 2 way, SP, double plate - 20AX, 2 way, SP, double plate
	Switches - 6 gang - 10AX, 2 way, SP, double plate - 20AX, 2 way, SP, double plate

WIRING AND INSTALLATION

Wiring capacity of the terminals

10A switches	20A switches
4x1 mm ²	4x1 mm ²
3x1,5 mm ²	4x1,5 mm ²
2x2,5 mm ²	3x2,5 mm ²
1x4 mm ²	2x4 mm ²
1x6 mm ²	1x6 mm ²

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

TECHNICAL CHARACTERISTICS

Rated current:	10A - 10AX - 20AX
Rated voltage:	250V~
Frequency:	50Hz
Insulating voltage:	250 V~
Protection degree:	IP20D
Operating temperature according to reference standard:	- 5°C +40°C
Max operating temperature:	+60°C
Glow Wire test: (for plastic elements)	850°C
Operating Testing:	40.000 operations at rated current. 100.000 operations for mechanical life (SCAME additional test)
Max installation altitude:	2000 m
Plate dimensions:	86x86 mm single plate 86x146 mm double plate 88x88 mm single plate (only Futura series) 88x148 mm double plate (only Futura series)
Mounting box type:	Flush 1-2 gang (min deepness 25mm) Surface 1-2 gang (min deepness 17mm)

Material:	CLASSICA, MODERNA, MODERNA SL, PIANA: Steel for plate and rocker cap. Engineering plastic for inserts FUTURA: Stainless steel AISI 304 for plate and rocker cap. Engineering plastic for inserts
Colour and version:	METAL PLATE AND ROCKER VERSION: - Polished brass - Satin brass - Polished chrome - Satin chrome - Polished black nickel <i>All metal plates and rocker caps are anti finger coated</i> <i>SCAME logo printed by laser on the frontplates.</i> ROCKER AND SOCKET PLASTIC FRAME: - Brown (only Classica Series) - Black (except Classica Series) - White <i>Writings and symbols by silk printing</i>

APPLICATION EXAMPLES




CONTROL DEVICES - DOUBLE POLE SWITCHES



REFERENCES STANDARDS

BS EN 60669-1 (2000)
Switches for household and similar fixed-electrical installation.
Part 1: General requirements.

LINE



VERSIONS

- 20A, DP, with neon
- 20A, DP, "Air conditioner" with neon
- 20A, DP, "Water heater" with neon
- 45A, DP, with neon
- 45A, DP, "Air conditioner" with neon
- 45A, DP, "Cooker" with neon
- 45A, DP, with neon, double plate
- 45A, DP, "Air conditioner" with neon, double plate
- 45A, DP, "Cooker" with neon, double plate

WIRING AND INSTALLATION

Wiring capacity of the terminals

20A switches	45A switches
3x2,5 mm ²	4x4 mm ²
2x4 mm ²	3x6 mm ²
1x6 mm ²	1x6 mm ²

TECHNICAL CHARACTERISTICS

Rated current:	20A - 45A
Rated voltage:	250V~
Frequency:	50Hz
Insulating voltage:	250V~
Protection degree:	IP 20D
Operating temperature according to reference standard:	- 5°C +40°C
Max operating temperature:	60°C
Glow Wire test: (For plastic elements)	850°C
Operating Testing:	40.000 operations at rated current 100.000 operations for mechanical life (SCAME additional test)
Max installation altitude:	2000 m
Plate dimensions:	86x86 mm single plate 86x146 mm double plate 88x88 mm single plate (only Futura series) 88x148 mm double plate (only Futura series)
Mounting box type	Flush 1-2 gang (min deepness 35mm) Surface 1-2 gang (min deepness 35mm)

Material:	CLASSICA, MODERNA, MODERNA SL, PIANA: Steel for plate and rocker cap. Engineering plastic for inserts FUTURA: Stainless steel AISI 304 for plate and rocker cap. Engineering plastic for inserts
Colour and version:	METAL PLATE AND ROCKER VERSION: - Polished brass - Satin brass - Polished chrome - Satin chrome - Polished black nickel <i>All metal plates and rocker caps are anti finger coated</i> SCAME logo printed by laser on the frontplate. ROCKER AND SOCKET PLASTIC FRAME: - Brown (only Classica series) - Black - White <i>Writings and symbols by silk printing</i>

APPLICATION EXAMPLES



BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant


CONTROL DEVICES - SPUR UNITS





REFERENCES STANDARDS

BS 1363-4 (1995)
 13A plugs, socket-outlets, adaptors and connection units.
 Part 4: specification for 13A fused connection units
 switched and unswitched.

LINE



VERSIONS

-  - With fuse, switch and neon
 - With fuse and switch
-  - With fuse and neon
 - With fuse

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

TECHNICAL CHARACTERISTICS

Rated current:	13A
Rated voltage:	250 V~
Frequency:	50 Hz
Insulating voltage:	250 V~
Protection degree:	IP 20D
Operating temperature according to Reference Standard:	- 5°C + 40°C
Max operating temperature:	60°C
Cabling capacity of the terminals:	3x2,5 mm ² 2x4 mm ² 1x6 mm ² (stranded)
Glow Wire test: (For plastic elements)	850° C
Max installation altitude:	2000 m
Plate dimensions:	86x86 mm single plate 86x146 mm double plate 88x88 mm single plate (only Futura series) 88x148 mm double plate (only Futura series)
Mounting box type:	Flush 1-2 gang (min deepness 25mm) Surface 1-2 gang (min deepness 25 mm)
Fuse:	Ceramic fuse to BS 1362, 13A 250V AC only

Material:	CLASSICA, MODERNA, MODERNA SL, PIANA: Steel for plate and rocker cap. Engineering plastic for inserts FUTURA: Stainless steel AISI 304 for plate and rocker cap. Engineering plastic for inserts
Colour and version:	METAL PLATE AND ROCKER VERSION: - Polished brass - Satin brass - Polished chrome - Satin chrome - Polished black nickel All metal plates and rocker caps are anti finger coated SCAME logo printed by laser on the frontplate ROCKER AND SOCKET PLASTIC FRAME: - Brown (only Classica series) - Black - White Writings and symbols by silk printing: white on brown or black plastic frame and black on white plastic frame

APPLICATION EXAMPLES



SOCKET OUTLETS - SWITCHED AND UNSWITCHED BSI SOCKETS



REFERENCES STANDARDS

- BS 1363-2 (1995)**
13A plugs, socket-outlets and adaptors.
Specification for 13A switched and unswitched socket-outlets.
- BS 546 (1954)**
Two-pole and Earthing-Pin plugs, socket-outlets and socket-outlet adaptors for AC (50-60 Hz) circuit up to 250V.
- BS 7288 (1990)**
Specification for socket-outlets incorporating residual current devices (S.R.C.D.S.)

LINE



VERSIONS

	- 13A single		- 13A SS DP switch, 45A DP switch, with neon
	- 13A SS, DP switch - 13A SS, DP switch, with neon		- 15A SS, DP switch
	- 13A DS, DP switch - 13A DS, DP switch, with neon - 13A DS, DP switch + RCD		- 5A SS, SP switch

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

TECHNICAL CHARACTERISTICS

Rated current:	5A - 13A - 15A
Rated voltage:	250V~
Frequency:	50 Hz
Insulating voltage:	250V~
Protection degree:	IP20D
Operating temperature according to Reference Standard:	- 5°C +40°C
Max operating temperature:	60°C
Cabling capacity of the terminals:	3x2,5 mm ² 3x4 mm ² 2x6 mm ² (stranded)
Glow Wire test: (For plastic elements)	850°C
Operating Testing:	15.000 operations at rated current for 13A 5.000 operations at rated current for 5A and 15A
Max installation altitude:	2000 m
Plate dimensions:	86x86 mm single plate 86x146 mm double plate 88x88 mm single plate (only Futura Series) 88x148 mm double plate (only Futura Series)
Mounting box type:	Flush 1-2 gang (min deepness 25mm - 35mm for 15A) Surface 1-2 gang (min deepness 25mm - 35mm for 15A)

Material:	CLASSICA, MODERNA, MODERNA SL, PIANA: Steel for plate and rocker cap. Engineering plastic for inserts FUTURA: Stainless steel AISI 304 for plate and rocker cap. Engineering plastic for inserts
Colour and version:	METAL PLATE AND ROCKER VERSION: - Polished brass - Satin brass - Polished chrome - Satin chrome - Polished black nickel <i>All metal plates and rocker caps are anti finger coated</i> SCAME logo printed by laser on the frontplate. ROCKER AND SOCKET PLASTIC FRAME: - Brown (only Classica Series) - Black - White <i>Writings and symbols by silk printing</i>


APPLICATION EXAMPLES



SOCKET OUTLETS - SWITCHED AND UNSWITCHED SOCKETS NOT UK STANDARDS



LINE

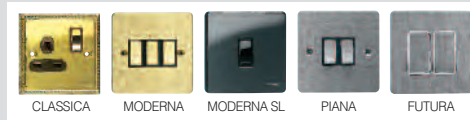

TECHNICAL CHARACTERISTICS

Rated current:	16A
Rated voltage:	250 V~
Frequency:	50 Hz
Insulating voltage:	250 V~
Protection degree:	IP20D
Operating temperature according to Reference Standard:	-5°C +40°C
Max operating temperature:	60°C
Cabling capacity of the terminals:	3x2,5 mm ² 3x4 mm ² 2x6 mm ² (stranded)
Glow Wire test: (For plastic elements)	850°C
Max installation altitude:	2000 m.
Plate dimensions:	86x86 mm single plate 88x88 mm single plate (only Futura series)
Mounting box type:	Flush 1 gang (min deepness 25mm) Surface 1 gang (min deepness 25 mm)

Material:	CLASSICA, MODERNA, MODERNA SL, PIANA: Steel for plate and rocker cap. Engineering plastic for inserts FUTURA: Stainless steel AISI 304 for plate and rocker cap. Engineering plastic for inserts
Colour and version:	STEEL PLATE AND ROCKER VERSION: - Polished gold - Satin gold - Polished chrome - Satin chrome - Polished black nickel <i>All metal plates and rocker caps are anti finger coated</i> <i>SCAME logo printed by laser on the frontplate.</i> ROCKER AND SOCKET PLASTIC FRAME: - Brown (only Classica series) - Black (except Classica series) - White <i>Writings and symbols by silk printing: white on brown or black plastic frame and black on white plastic frame.</i>

VERSIONS

	- 16A German single (shuttered)		- 15A 127V American single
	- 16A Euro-American single		- 15A 127V American double
	- 16A Euro-American double		- 15A 127V American single, SP switch
	- 16A Euro-American single + 10AX SP switch		- 16A SS, international single
			- 16A SS, international single, SP switch

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

APPLICATION EXAMPLES




SOCKETS OUTLETS - TEL & DATA SOCKETS



REFERENCES STANDARDS

BS 6312-2
FCC68
BS EN 60303-7

LINE



VERSIONS



- Telephone, BT master
- Telephone, BT secondary



- RJ11
- RJ12
- RJ45 cat5
- RJ45 cat6
- Double RJ11
- Double RJ12
- Double RJ45 cat5
- Double RJ45 cat6
- RJ11+RJ12
- RJ11+RJ45 cat5
- RJ11+RJ45 cat6
- RJ12+RJ45 cat5
- RJ12+RJ45 cat6

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

TECHNICAL CHARACTERISTICS

Protection degree:	IP 20D
Operating temperature according to Reference Standard:	- 5°C +40°C
Max operating temperature:	60°C
Max installation altitude:	2000 m
Plate dimensions	86x86 mm single plate 88x88 mm single plate (only Futura series)
Mounting box type	Flush 1 gang (min deepness 35 mm) Surface 1 gang (min deepness 35 mm)
Material:	CLASSICA, MODERNA, MODERNA SL, PIANA: Steel for plate and rocker cap. Engineering plastic for inserts FUTURA: Stainless steel AISI 304 for plate and rocker cap. Engineering plastic for inserts

Colour and version:	METAL PLATE AND ROCKER VERSION: - Polished brass - Satin brass
Colour and version:	- Polished chrome - Satin chrome - Polished black nickel <i>All metal plates are anti finger coated</i> <i>SCAME logo printed by laser on the frontplate</i> ROCKER AND SOCKET PLASTIC FRAME: - Brown (only Classica series) - Black - White <i>Writings and symbols by silk printing</i>

APPLICATION EXAMPLES




SOCKET OUTLETS - TV/FM/SAT



REFERENCES STANDARDS

BS EN 50083
Cabled distribution systems for television and sound signals.

LINE

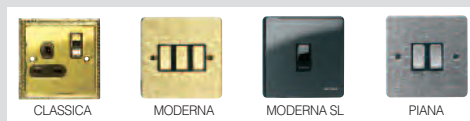

TECHNICAL CHARACTERISTICS

Frequency specification:	TV: 5 - 862 MHz FM: 87,5 - 108 MHz SAT: 950 - 2400 MHz
Protection degree:	IP 20D
Operating temperature according to Reference Standard:	-5°C +40°C
Max operating temperature:	60°C
Glow Wire test: (For plastic elements)	850°C
Max installation altitude:	2000 m
Plate dimensions:	86x86mm single plate
Mounting box type:	Flush 1 gang (min deepness 35mm) Surface 1 gang (min deepness 35mm)
Material:	Steel for plate and rocker cap. Engineering plastic for device frame.

Colour and version:	Metal plate version: - Polished gold
Colour and version:	- Satin gold - Polished chrome - Satin chrome - Polished black nickel <i>All metal plates are anti finger coated</i> SCAME logo printed by laser on the frontplate. ROCKER AND SOCKET PLASTIC FRAME: - Brown (only Classica series) - Black - White <i>Writings and symbols by silk printing</i>

VERSIONS

	- TV CO-AXIAL socket - SAT socket
	- TV/FM/SAT socket
	- TV/SAT socket - SAT/SAT socket - TV/FM CO-AXIAL socket

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

APPLICATION EXAMPLES




SOCKET OUTLET - SHAVER SUPPLY UNIT




REFERENCES STANDARDS

BS EN 61558-2-5 (2010)
 Safety for transformers, reactors, power supply units and combinations thereof. Particular requirements and tests for transformers for shavers. Power supply units for shavers and shaver supply units.

LINE



VERSIONS

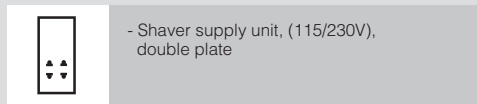

TECHNICAL CHARACTERISTICS

Rated current:	20VA
Rated voltage:	230V~ input 115V~/230V~ output
Frequency:	50Hz
Insulating voltage:	250V~
Protection degree:	IP20D
Operating temperature according to	
Reference Standard:	-5°C +40°C
Max operating temperature:	60°C
Cabling capacity of the terminals:	2x2,5 mm ² 1x4 mm ²
Glow Wire test: (for plastic elements)	850°C
Max installation altitude:	2000 m
Plate dimensions:	86x146 mm double plate 88x148 mm double plate (only Futura series)
Mounting box type:	Flush 2 gang (min deepness 35 mm)

Material:	CLASSICA, MODERNA, MODERNA SL, PIANA: Steel for plate and rocker cap. Engineering plastic for inserts FUTURA: Stainless steel AISI 304 for plate and rocker cap. Engineering plastic for inserts
Colour and version:	METAL PLATE AND ROCKER VERSION: - Polished brass - Satin brass - Polished chrome - Satin chrome - Polished black nickel <i>All metal plates are anti finger coated.</i> SCAME logo printed by laser on the frontplate. ROCKER AND SOCKET PLASTIC FRAME: - Brown (only Classica series) - Black (except Classica series) - White <i>Writings and symbols by silk printing</i>

APPLICATION EXAMPLES



BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

HOTEL - ACCESSORIES





REFERENCES STANDARDS

BS EN 60669-1 (2000)
Switches for household and similar fixed-electrical installation.
Part 1: General requirements.

LINE



VERSIONS

-  Key card switch
-  Dnd & CleanUp + bell push switch

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

TECHNICAL CHARACTERISTICS

Rated current:	10A
Rated voltage:	250 V~
Frequency:	50 Hz
Insulating voltage:	250 V~
Protection degree:	IP20D
Shutdown:	30 seconds after card removal. Card access zone illuminated.
Operating temperature according to Reference Standard:	-5°C +40°C
Max operating temperature:	60°C
Glow Wire test: (for plastic elements)	850°C
Max installation altitude:	2000 m
Plate dimensions:	86x86 mm single plate 88x88 mm single plate (only Futura series)
Mounting box type:	Flush 1 gang (min deepness 35 mm) Surface 1 gang (min deepness 35 mm)

Material:	Steel for plates and device cap. Engineering plastic for device frame.
Colour and version:	METAL PLATE AND ROCKER VERSION: - Polished brass - Satin brass - Polished chrome - Satin chrome - Polished black nickel <i>All metal plates and rocker caps are anti finger coated. SCAME logo printed by laser on the frontplate.</i> ROCKER AND SOCKET PLASTIC FRAME: - Black (except Classica Series) - White <i>Writings and symbols by silk printing</i>

APPLICATION EXAMPLES




ELECTRONIC - DIMMER CONTROL SWITCHES



REFERENCES STANDARDS

BS EN 60998-2-1 (2004)
Connecting devices for low voltage circuits for household and similar purposes. Particular requirements for connecting devices as separate entities with screw-type clamping units.

LINE

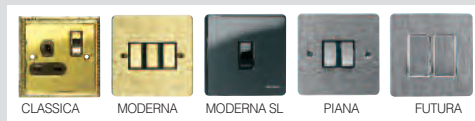

VERSIONS

	Switches - 1 gang: - 250W, 1 way - 250W, 2 way - 400W, 1 way - 400W, 2 way
	Switches - 2 gang: - 250W, 1 way - 250W, 2 way - 400W, 1 way - 400W, 2 way
	Switches - 3 gang: - 250W, 1 way, double plate - 250W, 2 way, double plate - 400W, 1 way, double plate - 400W, 2 way, double plate
	Switches - 4 gang: - 250W, 1 way, double plate - 250W, 2 way, double plate - 400W, 1 way, double plate - 400W, 2 way, double plate

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

TECHNICAL CHARACTERISTICS

Rated load:	250W – 400W – 500W – 1000W
Rated voltage:	250V~
Frequency:	50Hz
Insulating voltage:	250V~
Protection degree:	IP20D
Operating temperature according to Reference Standard:	-5°C +40°C
Max operating temperature:	60°C
Glow Wire test: (For plastic elements)	850°C
Max installation altitude:	2000 m
Plate dimensions:	86x86 mm single plate 86x146 mm double plate 88x88 mm single plate (only Futura series) 88x148 mm double plate (only Futura series)
Mounting box type	Flush 1-2 gang (min deepness 35 mm) Surface 1-2 gang (min deepness 35 mm)

Material:	CLASSICA, MODERNA, MODERNA SL, PIANA: Steel for plate and rocker cap. Engineering plastic for inserts FUTURA: Stainless steel AISI 304 for plate and rocker cap. Engineering plastic for inserts
Colour and version:	METAL PLATE AND ROCKER VERSION: - Polished brass - Satin brass - Polished chrome - Satin chrome - Polished black nickel <i>All metal plates and knob caps are anti finger coated. SCAME logo printed by laser on the frontplate.</i> ROCKER AND SOCKET PLASTIC FRAME: - Brown (only Classica series) - Black (except Classica series) - White <i>Writings and symbols by silk printing</i>

APPLICATION EXAMPLES



ELECTRONIC-FAN CONTROL SWITCH



REFERENCES STANDARDS

BS EN 60998-2-1 (2004)
Connecting devices for low voltage circuits for household and similar purposes. Particular requirements for connecting devices as separate entities with screw-type clamping units.

LINE



VERSIONS

1 gang, Fan control switch

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

TECHNICAL CHARACTERISTICS

Rated load:	80W
Position:	5. On-Off type rotating knob
Rated voltage:	250 V~
Frequency:	50 Hz
Insulating voltage:	250 V~
Protection degree:	IP20D
Operating temperature according to Reference Standard:	-5°C +40°C
Max operating temperature:	60°C
Glow Wire test: (For plastic elements)	850°C
Max installation altitude:	2000 m
Plate dimensions:	86x86 mm single plate 88x88 mm single plate (only Futura series)
Mounting box type:	Flush 1 gang (min deepness 35 mm) Surface 1 gang (min deepness 35 mm)

Material:	CLASSICA, MODERNA, MODERNA SL, PIANA: Steel for plate and rocker cap. Engineering plastic for inserts FUTURA: Stainless steel AISI 304 for plate and rocker cap. Engineering plastic for inserts
Colour and version:	METAL PLATE AND ROCKER VERSION: - Polished brass - Satin brass - Polished chrome - Satin chrome - Polished black nickel <i>All metal plates and knob caps are anti finger coated. SCAME logo printed by laser on the frontplate.</i> ROCKER AND SOCKET PLASTIC FRAME: - Brown (only Classica Series) - Black (except Classica Series) - White <i>Writings and symbols by silk printing</i>

APPLICATION EXAMPLES




ACCESSORIES






REFERENCES STANDARDS

BS 5733 (1995)

LINE



VERSIONS

-  - Blank plate, single
-  - Blank plate, double
-  - Cable outlets

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

TECHNICAL CHARACTERISTICS

Operating temperature according to Reference Standard:	-5°C +40°C
Max operating temperature:	60°C
Max installation altitude:	2000 m.
Plate dimensions:	86x86 mm single plate 88x88 mm single plate (only Futura Series) 86x146 mm double plate 88x148 mm double plate (only Futura Series)
Mounting box type:	Flush 1-2 gang Surface 1-2 gang

Material:	Steel
Colour and version:	METAL PLATE VERSION: - Polished gold
Colour and version:	- Satin gold - Polished chrome - Satin chrome - Polished black nickel <i>All metal plates are anti finger coated.</i> <i>SCAME logo printed by laser on the frontplates.</i>

APPLICATION EXAMPLES

