

## MODULAR ENCLOSURES AND INSTALLATION ACCESORIES



## REFERENCE STANDARDS

IEC EN 60670-1

IEC EN 60670-24





## MARKINGS AND DIRECTIVES



## QUALITY MARKS



## VERSIONS

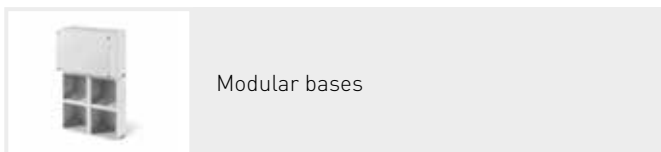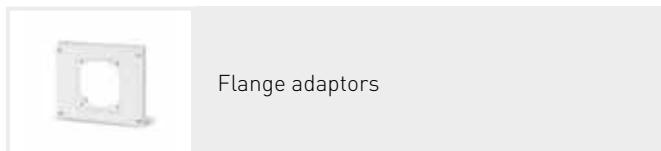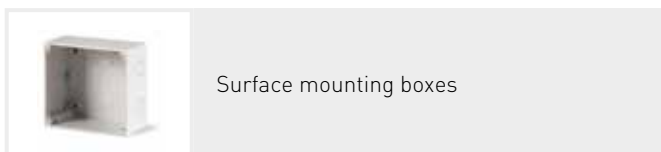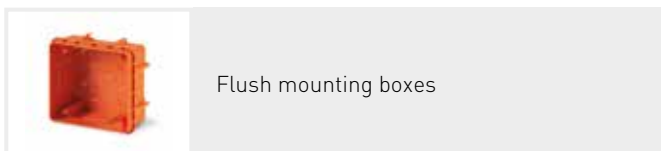

## TECHNICAL CHARACTERISTICS

Protection degree:	Surface mounting IP66 Flush mounting IP55
Installation temperature:	-25°C +60°C
Enclosure material:	Thermoplastic (Halogen Free)
Colour:	Grey RAL7035
Self extinguishing degree (GWT):	650°C
Impact resistance (IK degree)	IK08
Insulation class:	Class II (double insulation) □
Compatibility:	OMNIA Series 16A-32A
Compatibility:	OMNIAPLUS Series
DIN modules (consumer unit version):	2 socket outlets 16A-32A 6 modules 3 socket outlets 16A-32A 6 modules 4 socket outlets 16A-32A 16 modules

## BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Limited resistance	Resistant	Not resistant	Not resistant	Not resistant	Limited resistance	Limited resistance	Resistant

Resistance values to chemical agents have to be considered indicative. For further information and specific substances, contact the technical service.



■ CABLE ENTRIES

Surface mounting boxes		Modular bases	
Top/Bottom	Side	Top/Bottom	Side
Blank sides with drilling point marks max M25 (16A-32A) max M40 (63A)	Blank sides	Blank sides	Blank sides

