

ENCLOSURES AND FLANGE ADAPTORS



REFERENCE STANDARDS

EN 60670-1

EN 60670-22






MARKINGS AND DIRECTIVES



QUALITY MARKS





VERSIONS

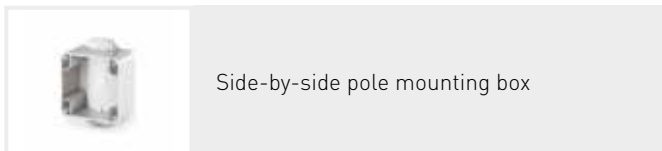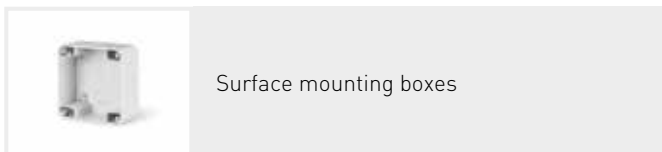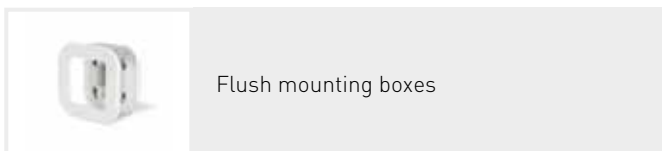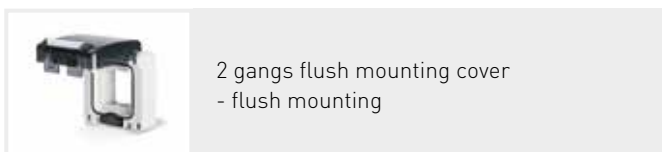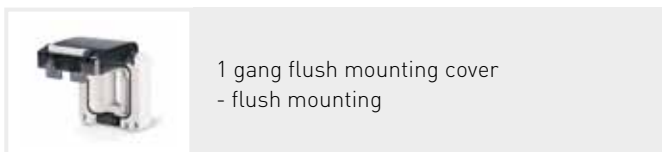

TECHNICAL CHARACTERISTICS

Protection degree:	IP66 ¹⁾
Cable entries:	Blank side
Installation temperature:	-20°C +60°C
Self extinguishing degree (GWT):	650°C
Material:	Thermoplastic (Halogen Free)
Impact resistance (IK degree):	IK07
Colour:	Grey RAL 7035 (base) Smoke-tinted transparent (cover)

¹⁾ IP55 for 3-module flush-mounting box adapter flange.

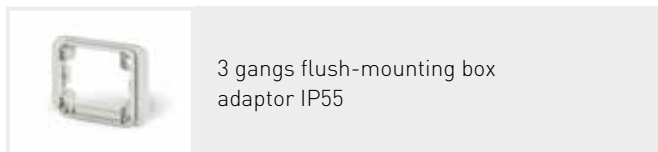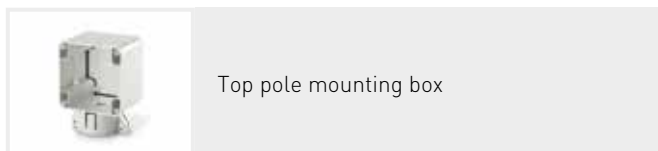

Enclosures accept EVOLUTION Series modules.

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Limited resistance	Limited resistance	Resistant	Not resistant	Not resistant	Resistant	Limited resistance	Resistant

Resistance values to chemical agents have to be considered indicative. For further information and specific substances, contact the technical service.

